

APPLICATIONS

Ideal for one or multiple tap outlets to your garden, toilet and laundry, the Grundfos JPRain range offers a reliable solution to help you utilise your collected rainwater in the best possible way.

FEATURES



- 3 models: JPRain, JPRain MP, JPRain PT
- Self priming from bore and rainwater tank
- Strong suction capacity
- Automatic on/off switch
- Built in thermal protection
- Suitable for above or underground rainwater tanks
- Handles small sandy impurities with ease


CONSTRUCTION

- Technopolymer pump body
- Carbon/ceramic mechanical seal
- AISI 304 stainless steel shaft
- 1 x 240V, IP44 motor
- Insulation Class F, with built-in overload protection

PERFORMANCE

Pumps	Discharge Pressure (kPa/psi) - based on zero suction lift						
	150	200	250	300	350	400	500
	22	29	36	44	51	58	72
Output (l/min)							
JPRain 3 MP	-	51	35	26	-	-	-
JPRain 4 MP	-	-	51	39	26	-	-

As a guide 1 tap  = 10 litres per minute • 1 sprinkler  = 15 litres per minute

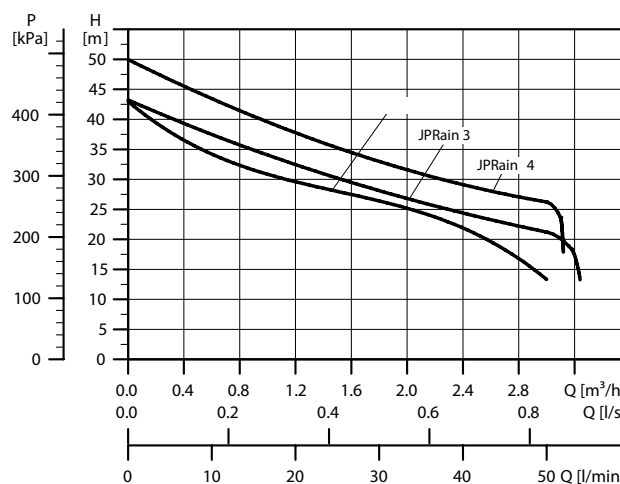

Bare pumps only - there is a pressure drop when using the MP versions.

DIMENSIONS

