

PROMAX SEPTIC TANKS


When it comes to septic tanks in New Zealand, there is no room for compromise. Hygiene and safety are paramount, and the structural integrity of the tank must be flawless.

Promax Septic Tanks

Our 'Single Stage' filtered septic tanks are designed by geotechnical experts and manufactured to meet the stringent standards for New Zealand septic tanks.

Each heavy-duty ribbed tank is fully tested to withstand ground and water pressure. For all its strength, it is lightweight, meaning you'll save on transport and installation costs. As you'd expect, every Promax septic tank is internally plumbed up to the outlets.

- Very strong heavy duty one-piece ribbed construction
- Lightweight means savings on transport and installation costs
- Polyethylene will not corrode or rot
- Includes Taylex Outlet Filter
- Easy to install using 100mm inlet & outlet

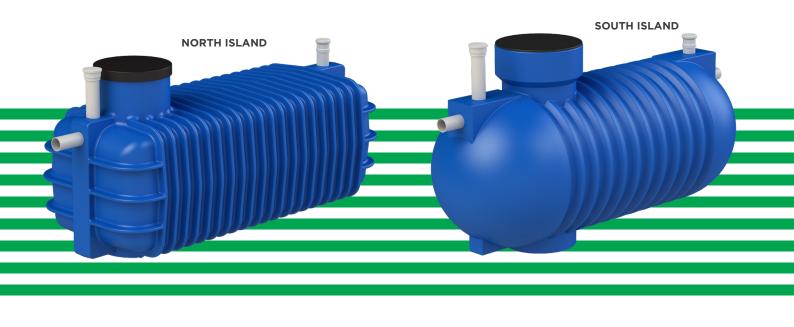

(FAX) 09 407 3578



PROMAX **SEPTIC TANKS**

North Island Septic Tanks

CODE	NAME	Capacity (L)	Length (mm)	Manhole (dia)	Weight (kg	Diameter (mm)	Outlets (mm)
UEST05000DB	ENDURO Septic Tank 5,000 Ltr 1.0 Dia	5,000 Ltr	5071	600	250	1250	1x100
UEST04000DB	ENDURO Septic Tank 4,000 Ltr 1.0 Dia	4,000 Ltr	4071	600	175	1250	1x100
UEST03000DB	ENDURO Septic Tank 3,000 Ltr 1.0 Dia	3,000 Ltr	3071	600	150	1250	1x100
UEST02000DB	ENDURO Septic Tank 3,000 Ltr 1.0 Dia	2,000 Ltr	2071	600	100	1250	1x100

South Island Septic Tanks

CODE	NAME	Capacity (L)	Length (mm)	Manhole (dia)	Weight (kg	Diameter (mm)	Outlets (mm)
UXST05000	XPRESS Septic Tank 5,000 Ltr 1.2 Dia	5,000 Ltr	5000	600	200	1280	1x100
UXST04000	XPRESS Septic Tank 4,000 Ltr 1.2 Dia	4,000 Ltr	4000	600	175	1280	1x100
UXST03000	XPRESS Septic Tank 3,000 Ltr 1.2 Dia	3,000 Ltr	3100	600	150	1280	1x100
UXST02000	XPRESS Septic Tank 2,000 Ltr 1.2 Dia	2,000 Ltr	1950	600	100	1280	1x100

Minimum Septic Tank Operational Capacities in Litres As per AS/NZS 1546							
Type of Wastewater	Pe	Persons Bedroon					
	1 to 5	6 to 10	1 to 3	4 to 6			
All-Waste	3,000	4,500	3,000	4,500			
Greywater Only	1,800	2,700	1,800	2,700			
Blackwater Only	1,500	2,500	1,500	2,500			

Note:

1. Capacities exclude cold climate effects and food waste disposal unit

requirements: these need to be subject to specific design

2. Local authorities may have different minimum requirements





🗩 Promax